


大连奇耘电子有限公司
DALIAN QIYUN DISPLAY CO., LTD.

确认此型号所有图纸;签字确认:

DESIGNED BY: YSX	EDS803D(T)P6.35V5B	VERSION: 1.0 NO. 1 OF 3	1. DISPLAY TYPE: TN/POSITIVE	2. OPERATING VOLTAGE: 5.0V	3. DRIVE MODE: 1/1D,1/1B	4. OPERATING TEMP: -20°C~70°C	5. STORAGE TEMP: -30°C~80°C	6. POLARIZER TYPE: TRANFLECTIVE	7. VIEWING DIRECTION: 6:00	8. CONNECTOR: PIN	9. CUSTOMER NO:	10. LCM NO:	VERSION	REVISION RECORD
CHECKED BY: LJY		UNIT: mm DATE: 2002-03-12											1.0	初版
TOLERANCES UNLESS OTHERWISE SPECIFIED:±0.2													2.0	
													3.0	
													4.0	

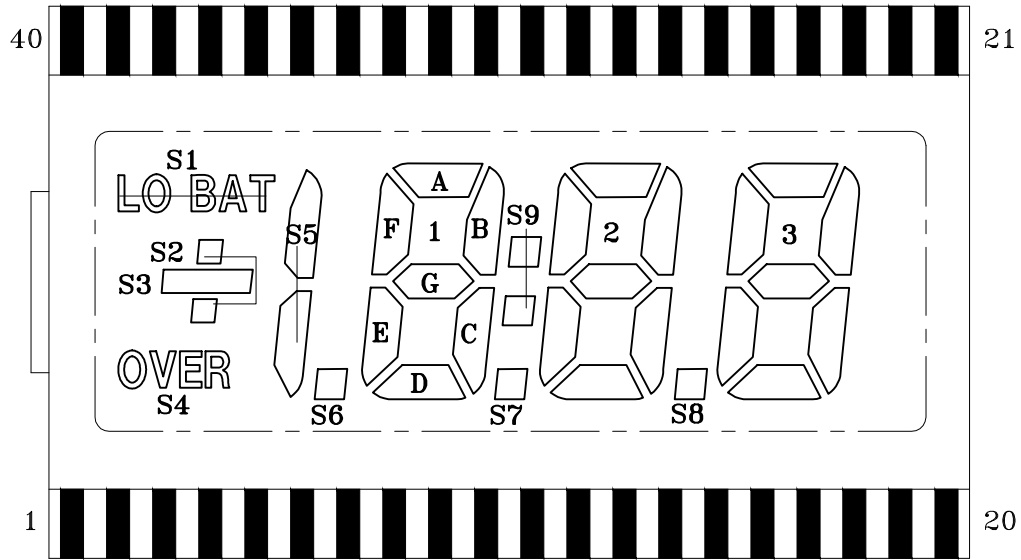

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
COM1	COM1	S3	S5					S6	1E	1D	1C	S7	2E	2D	2C	S8	3E	3D	3C	3B

PIN	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
COM1	3A	3F	3G	2B	2A	2F	2G	S9	1B	1A	1F	1G					S4	S1	S2	COM1



大连奇耘电子有限公司
DALIAN QIYUN DISPLAY CO., LTD.

DESIGNED BY:

YSX


EDS803D(T)P6.35V5B

VERSION: 1.0

NO. 2 OF 3

CHECKED BY:


LJY




UNIT: mm

DATE: 2002-03-12

TOLERANCES UNLESS OTHERWISE SPECIFIED: ±0.2



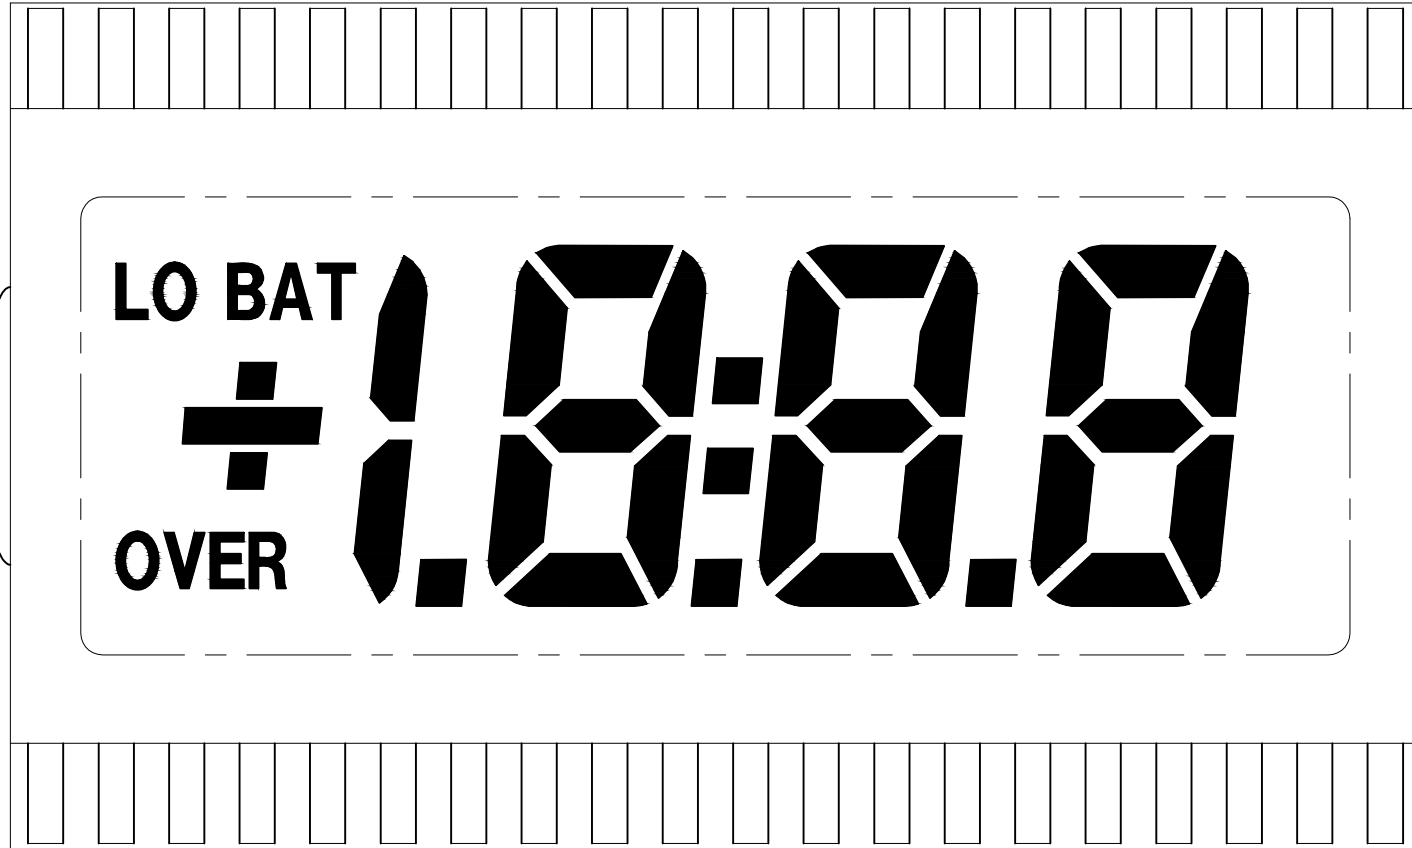

大连奇耘电子有限公司
DALIAN QIYUN DISPLAY CO., LTD.

DESIGNED BY: YSX	EDS803D(T)P6.35V5B	VERSION: 1.0
		NO. 3 OF 3
CHECKED BY: LJF		UNIT: mm
		DATE: 2002-3-12
TOLERANCES UNLESS OTHERWISE SPECIFIED: ±0.2		

全显示效果图