
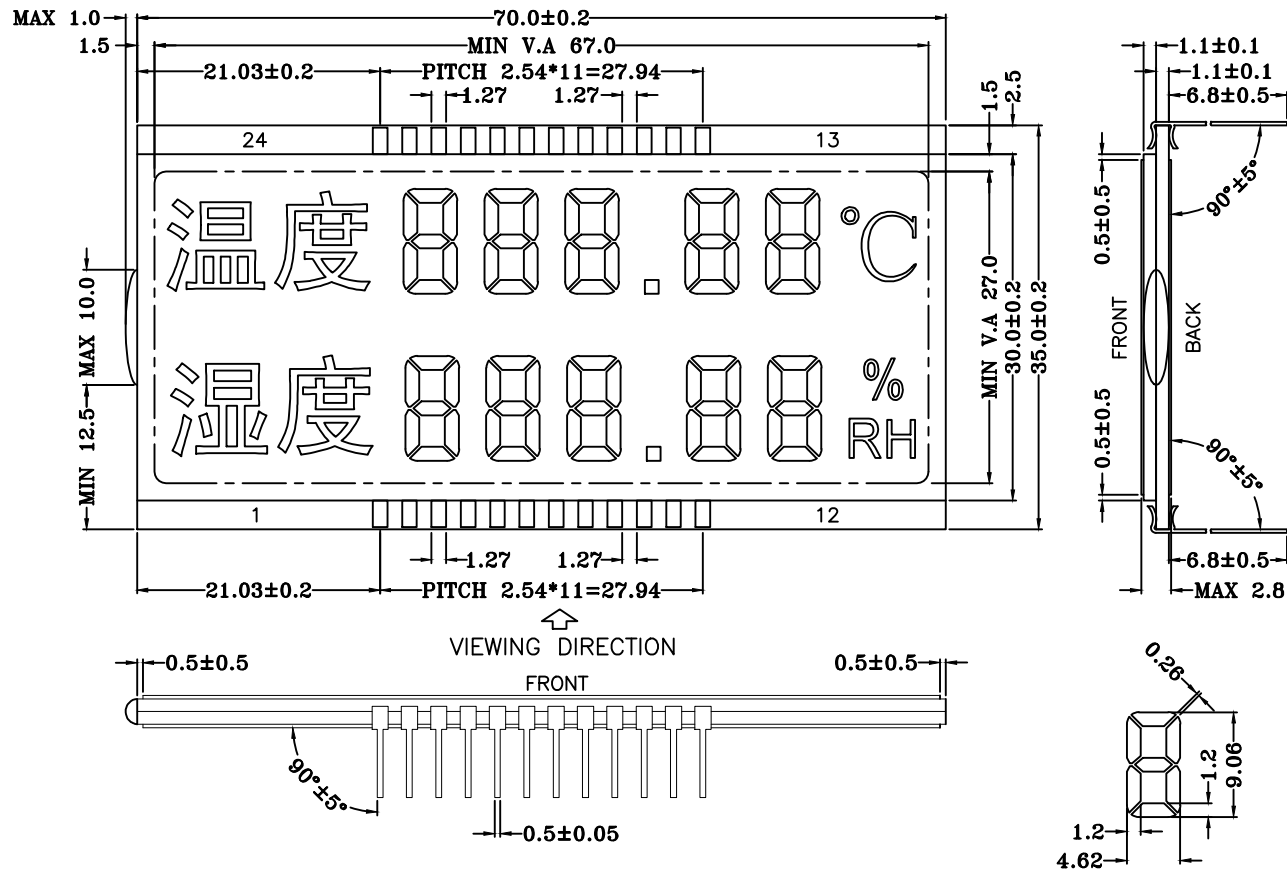


Autodesk




 大连奇耘电子有限公司  
DALIAN QIYUN DISPLAY CO., LTD.

确认此型号所有图纸;签字确认:


DESIGNED BY: <b>LML</b>	<b>GDC03849S(T)P6.8V3B</b>	VERSION: 1.0 NO. 1 OF 4	1. DISPLAY TYPE: HTN/POSITIVE	2. OPERATING VOLTAGE: 3.3V	6. POLARIZER TYPE: TRANSLUCENT	VERSION	REVISION RECORD
CHECKED BY: <b>HQM</b>		UNIT: mm DATE: 2015-01-27	3. DRIVE MODE: 1/4DUTY,1/3BIAS	4. OPERATING TEMP: $-40^\circ\text{C} \sim 80^\circ\text{C}$	7. VIEWING DIRECTION: 6:00	1.0	初版
TOLERANCES UNLESS OTHERWISE SPECIFIED: $\pm 0.2$			5. STORAGE TEMP: $-40^\circ\text{C} \sim 90^\circ\text{C}$	8. CONNECTOR: PIN	9. CUSTOMER NO:	2.0	
			10. LCM NO:			3.0	
						4.0	

Autodesk

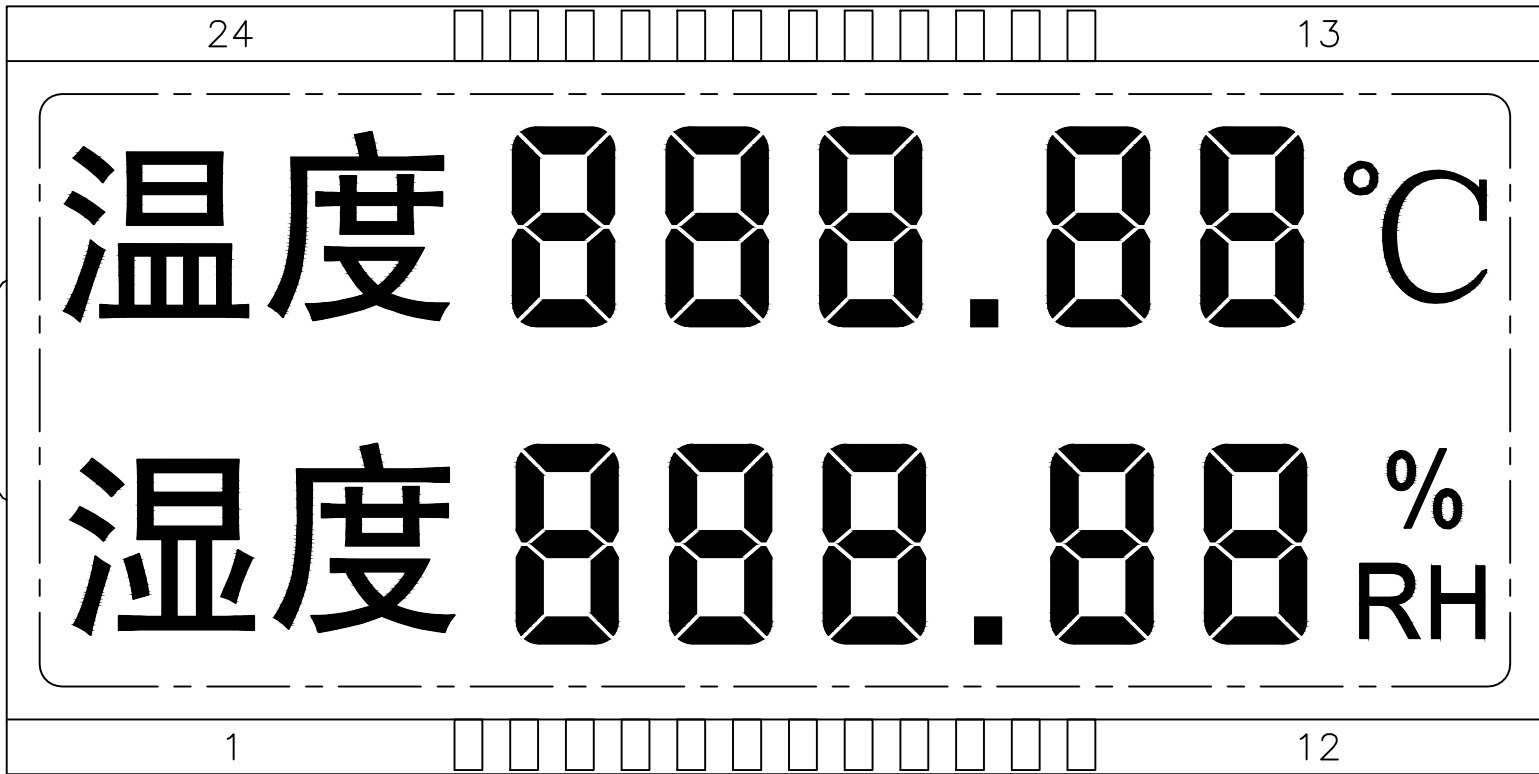


 大连奇耘电子有限公司  
DALIAN QIYUN DISPLAY CO., LTD.

DESIGNED BY: LML	GDC03849S(T)P6.8V3B	VERSION: 1.0 NO. 2 OF 4
---------------------	---------------------	----------------------------

CHECKED BY: HQM		UNIT: mm DATE: 2015-01-27
--------------------	-------------------------------------------------------------------------------------	------------------------------

TOLERANCES UNLESS OTHERWISE SPECIFIED: ±0.2

全显示效果图

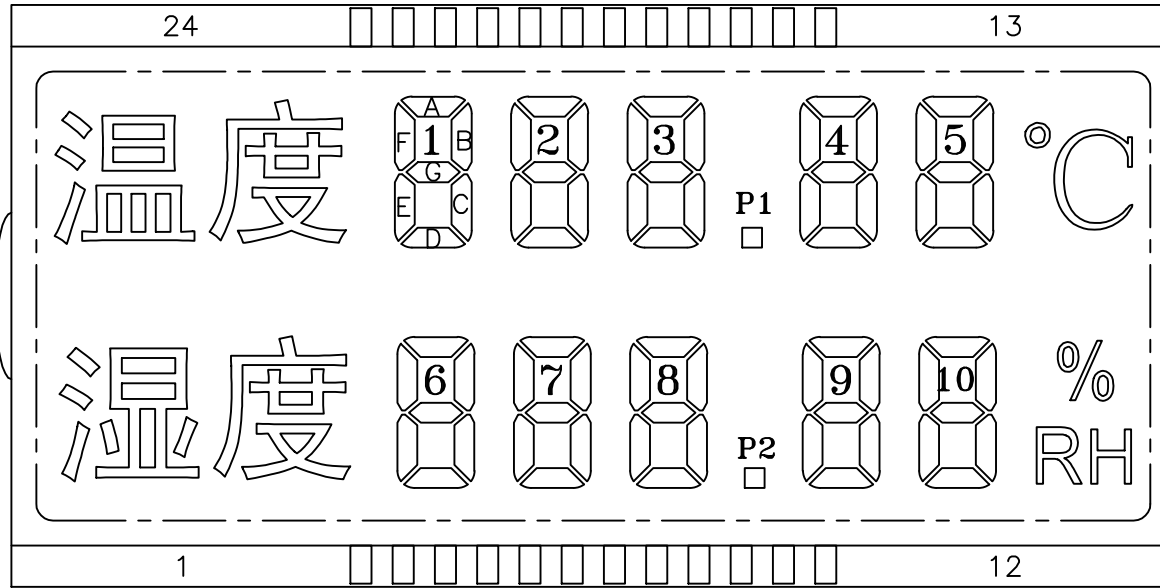

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
COM0	COM0				湿度	6A		7A	P2	8A	%	9A	RH	10A	5D	°C	4D		3D	P1	2D		1D	温度
COM1		COM1			6F	6B	7F	7B	8F	8B	9F	9B	10F	10B	5C	5E	4C	4E	3C	3E	2C	2E	1C	1E
COM2			COM2		6G	6C	7G	7C	8G	8C	9G	9C	10G	10C	5B	5G	4B	4G	3B	3G	2B	2G	1B	1G
COM3				COM3	6E	6D	7E	7D	8E	8D	9E	9D	10E	10D	5A	5F	4A	4F	3A	3F	2A	2F	1A	1F



大连奇耘电子有限公司

DALIAN QIYUN DISPLAY CO., LTD.

DESIGNED BY:

LML


GDC03849S(T)P6.8V3B

VERSION: 1.0

NO. 3 OF 4

CHECKED BY:

HQM




UNIT: mm


DATE: 2015-01-27

TOLERANCES UNLESS OTHERWISE SPECIFIED: ±0.2


SEG

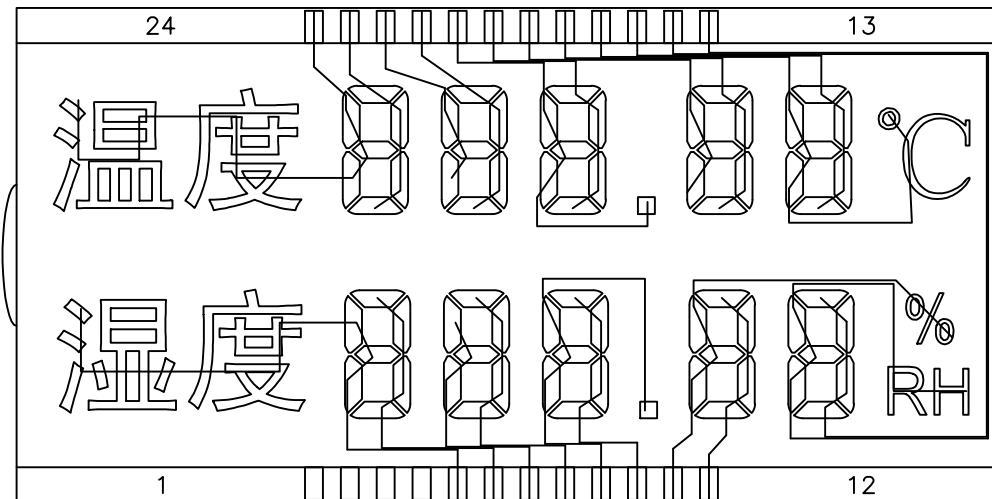

COM

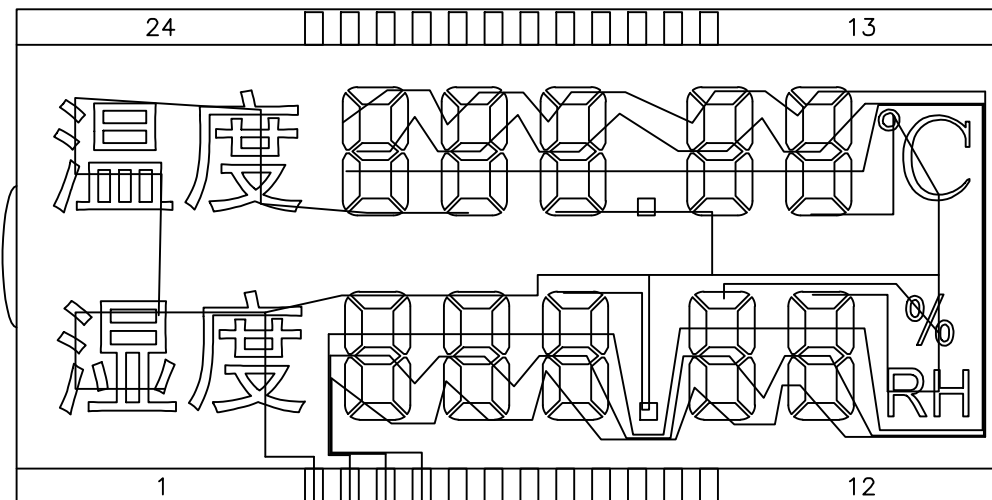


**大连奇耘电子有限公司**  
 DALIAN QIYUN DISPLAY CO., LTD.

DESIGNED BY: <b>LML</b>	<b>GDC03849S(T)P6.8V3B</b>	VERSION: 1.0 NO. 4 OF 4
CHECKED BY: <b>HQM</b>	 	UNIT: mm DATE: 2015-01-27

TOLERANCES UNLESS OTHERWISE SPECIFIED:±0.2