
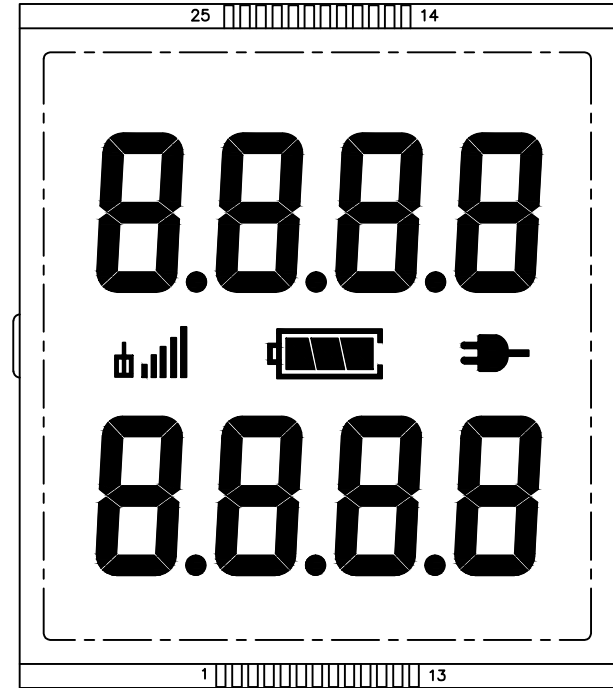
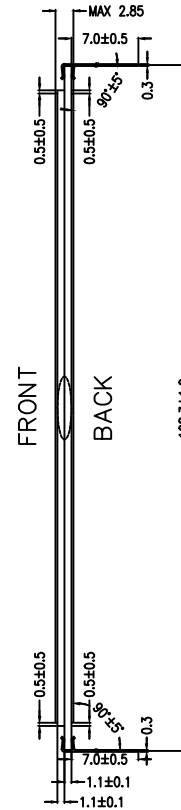


reason

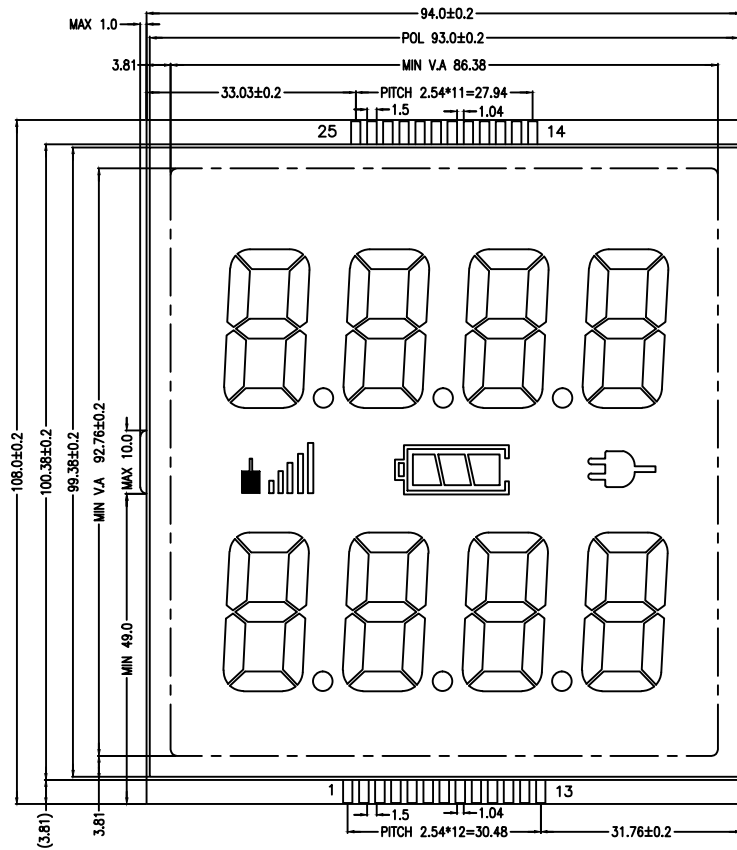

全显示效果图

NOTES:

- | | |
|--------------------------------------|-------------------------|
| 1. DISPLAY TYPE: | TN |
| 2. LCD OPERATING VOLTAGE: | 3.3V |
| 3. OPERATING TEMPERATURE: | 0°C~50°C |
| 4. STORAGE TEMPERATURE: | -10°C~60°C |
| 5. DRIVE MODE: | 1/4D,1/3B |
| 6. VIEWING DIRECTION: | 6:00 |
| 7. POLARIZER TYPE: | TRANSFLECTIVE, POSITIVE |
| 8. CONNECTOR: | PIN |
| 9. CUSTOMER NO: | --- |
| 10. Unspecified tolerance is ±0.20mm | |



大连奇耘电子有限公司
DALIAN QIYUN DISPLAY CO.,LTD.

DESIGNED BY:

CGS


GDC822N(T)P7V3B

VERSION: 1.0

NO. 1 OF 3

CHECKED BY:



CGS



UNIT: MM

DATE: 2021-12-15

reason

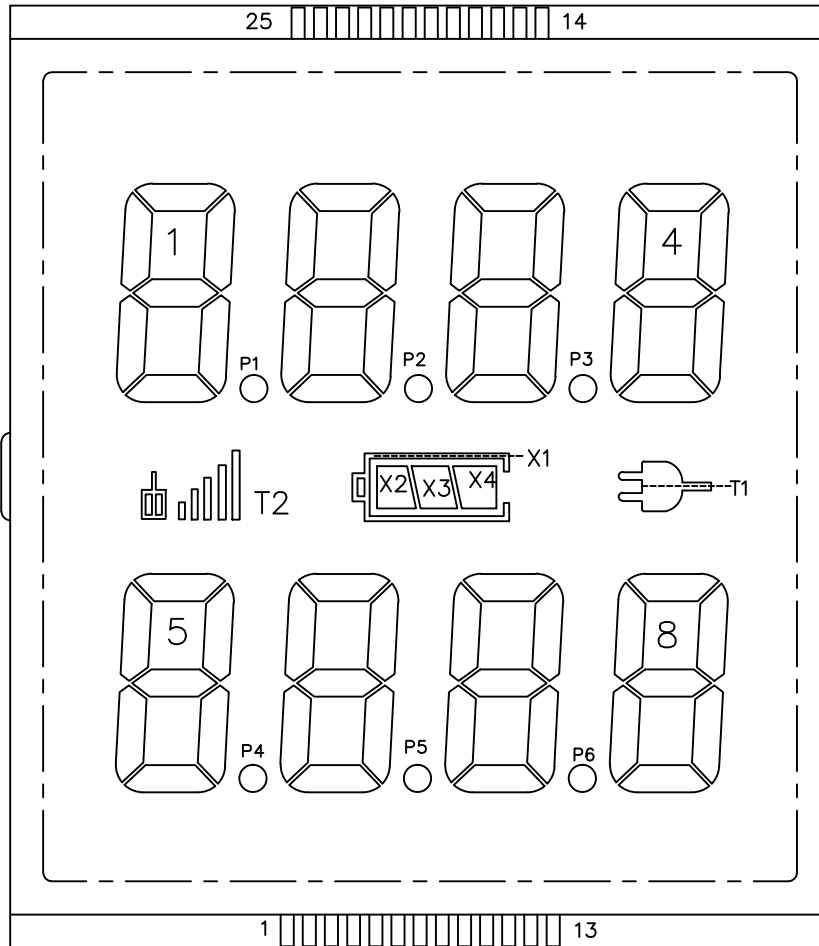

大連奇耘电子有限公司
DALIAN QIYUN DISPLAY CO.,LTD.

DESIGNED BY:

CGS


GDC822N(T)P7V3B

VERSION: 1.0

NO. 2 OF 3

CHECKED BY:

CGS




UNIT: MM


DATE: 2021-12-15

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25
COM1	X1	5D	P4	6D	P5	7D	P6	8D	T2	COM1				4B	4A	3B	3A	2B	2A	1B	1A	COM1			
COM2	X3	5E	5C	6E	6C	7E	7C	8E	8C		COM2			4G	4F	3G	3F	2G	2F	1G	1F	COM2			
COM3	X4	5F	5G	6F	6G	7F	7G	8F	8G			COM3													COM3
COM4	X2	5A	5B	6A	6B	7A	7B	8A	8B				COM4	T1	4D	P3	3D	P2	2D	P1	1D				COM4

reason

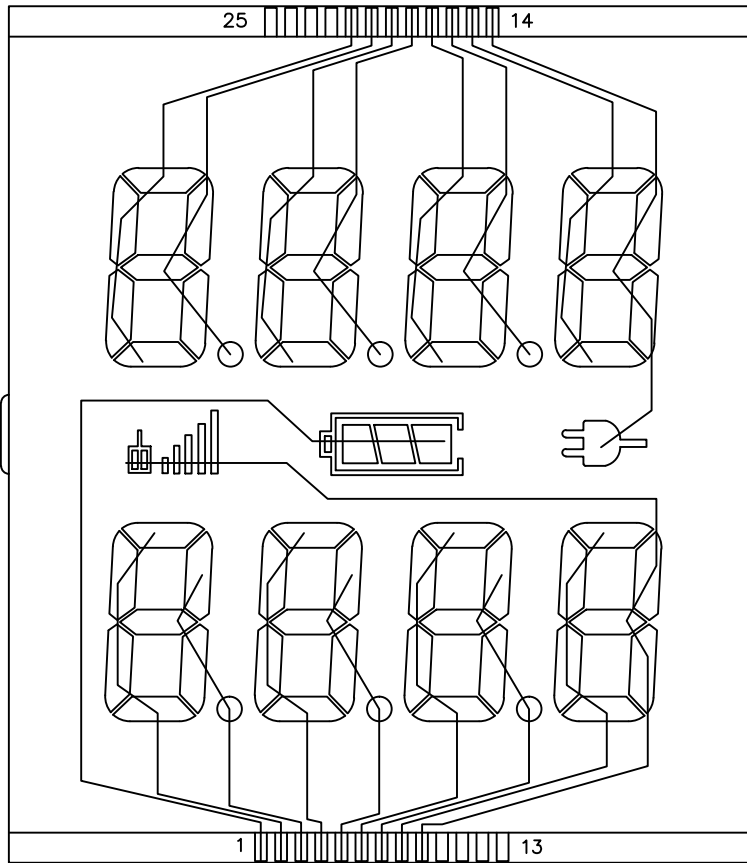

SEG

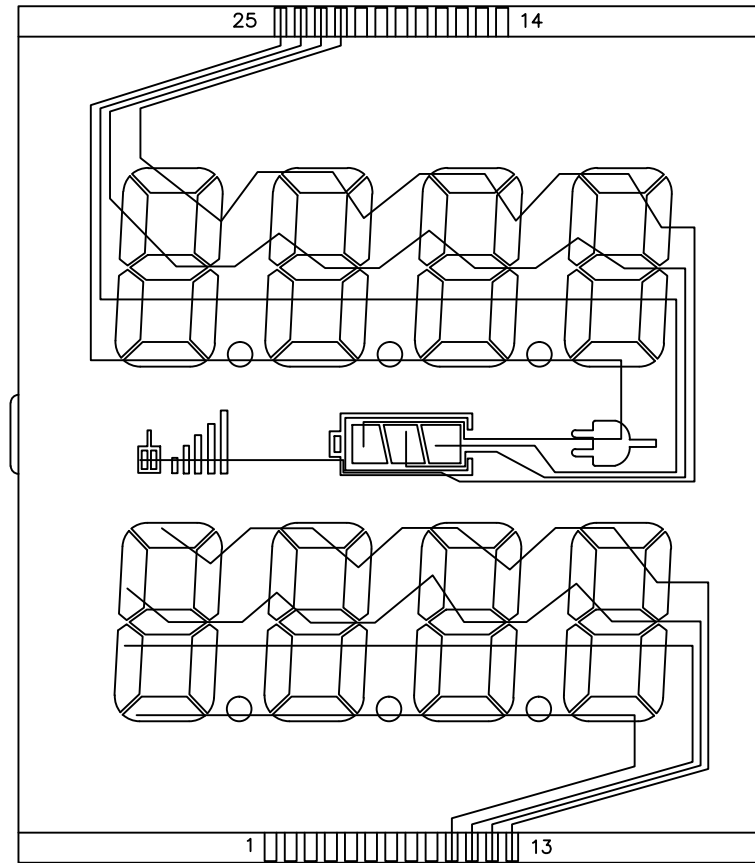

COM



大连奇耘电子有限公司
DALIAN QIYUN DISPLAY CO.,LTD.

DESIGNED BY:

CGS


GDC822N(T)P7V3B

VERSION: 1.0

NO. 3 OF 3

CHECKED BY:

CGS



UNIT: MM

DATE: 2021-12-15