


大连奇耘电子有限公司
DALIAN QIYUN DISPLAY CO., LTD.

确认此型号所有图纸;签字确认:

DESIGNED BY: LYS	GDC04362S(T)P10V3T	VERSION: 2.0 NO. 1 OF 4	1. DISPLAY TYPE: HTN/POSITIVE	6. POLARIZER TYPE: TRANSFLECTIVE	VERSION	REVISION RECORD
CHECKED BY: LC		UNIT: mm DATE: 2019-05-28	2. OPERATING VOLTAGE: 3.0V	7. VIEWING DIRECTION: 12:00	1.0	初版
TOLERANCES UNLESS OTHERWISE SPECIFIED:±0.2			3. DRIVE MODE: 1/4DUTY,1/3BIAS	8. CONNECTOR: PIN	2.0	反射改半透
			4. OPERATING TEMP: -40°C~80°C	9. CUSTOMER NO:	3.0	
			5. STORAGE TEMP: -45°C~85°C	10. LCM NO:	4.0	

36

19

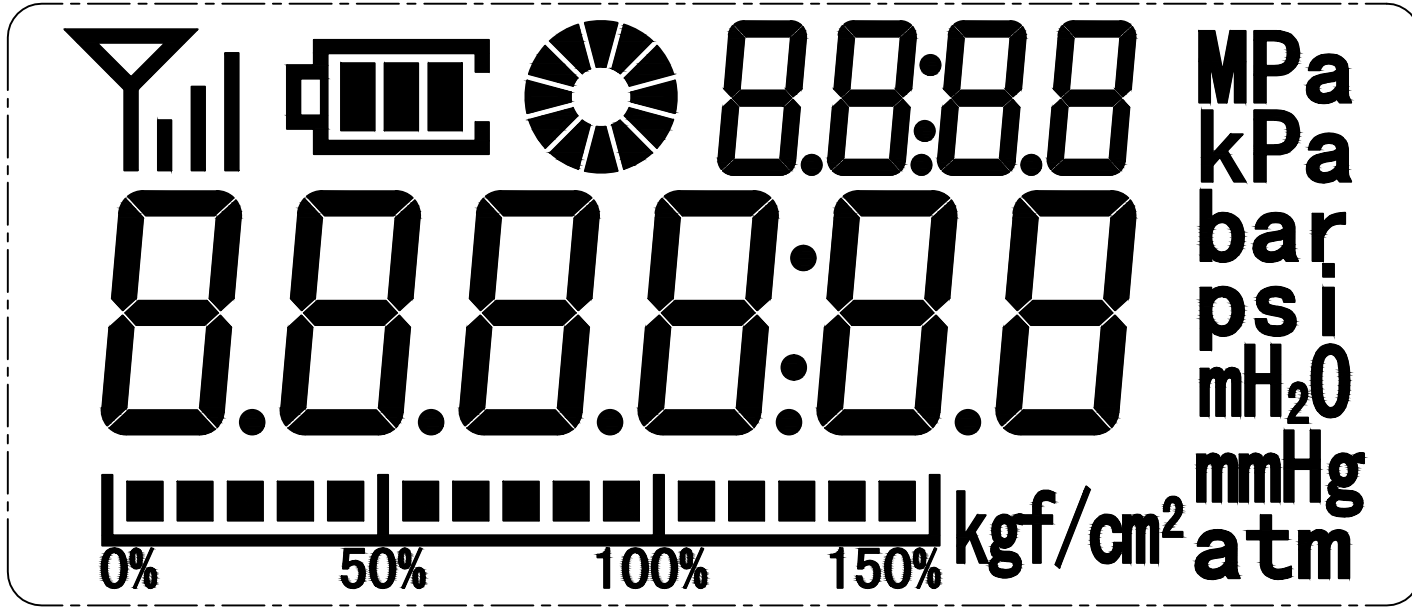

1

18



大连奇耘电子有限公司
DALIAN QIYUN DISPLAY CO., LTD.

DESIGNED BY:

LYS


GDC04362S(T)P10V3T

VERSION: 2.0

NO. 2 OF 4

CHECKED BY:

LC




UNIT: mm

DATE: 2019-05-28

TOLERANCES UNLESS OTHERWISE SPECIFIED: ±0.2

全显示效果图

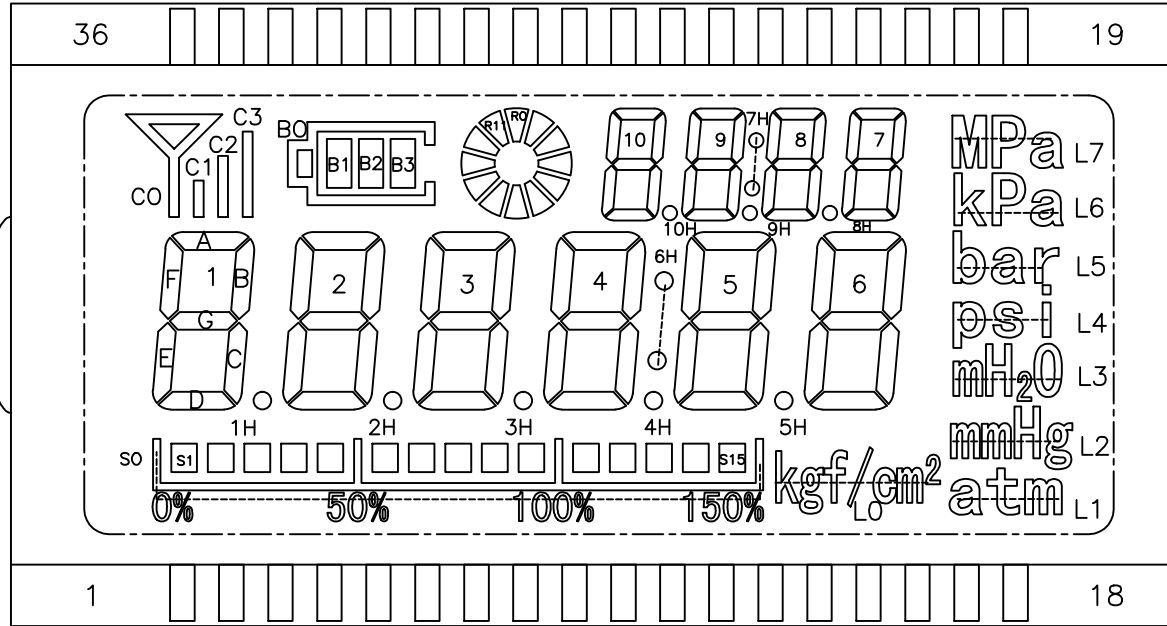

PIN	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36
COM1	7F	7A	8F	8A	9F	9A	10F	10A	R0	R4	R8	B0	C0	--	COM1	--	--	--
COM2	7G	7B	8G	8B	9G	9B	10G	10B	R1	R5	R9	B1	C1	--	--	COM2	--	--
COM3	7E	7C	8E	8C	9E	9C	10E	10C	R2	R6	R10	B2	C2	--	--	--	COM3	--
COM4	7D	7H	8D	8H	9D	9H	10D	10H	R3	R7	R11	B3	C3	--	--	--	--	COM4

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
COM1	1F	1A	2F	2A	3F	3A	4F	4A	5F	5A	6F	6A	S0	S4	S8	S12	L0	L4
COM2	1G	1B	2G	2B	3G	3B	4G	4B	5G	5B	6G	6B	S1	S5	S9	S13	L1	L5
COM3	1E	1C	2E	2C	3E	3C	4E	4C	5E	5C	6E	6C	S2	S6	S10	S14	L2	L6
COM4	1D	1H	2D	2H	3D	3H	4D	4H	5D	5H	6D	6H	S3	S7	S11	S15	L3	L7



大连奇耘电子有限公司
DALIAN QIYUN DISPLAY CO., LTD.

DESIGNED BY:

LYS


GDC04362S(T)P10V3T

VERSION: 2.0

NO. 3 OF 4

CHECKED BY:

LC




UNIT: mm


DATE: 2019-05-28

TOLERANCES UNLESS OTHERWISE SPECIFIED: ±0.2

SEG

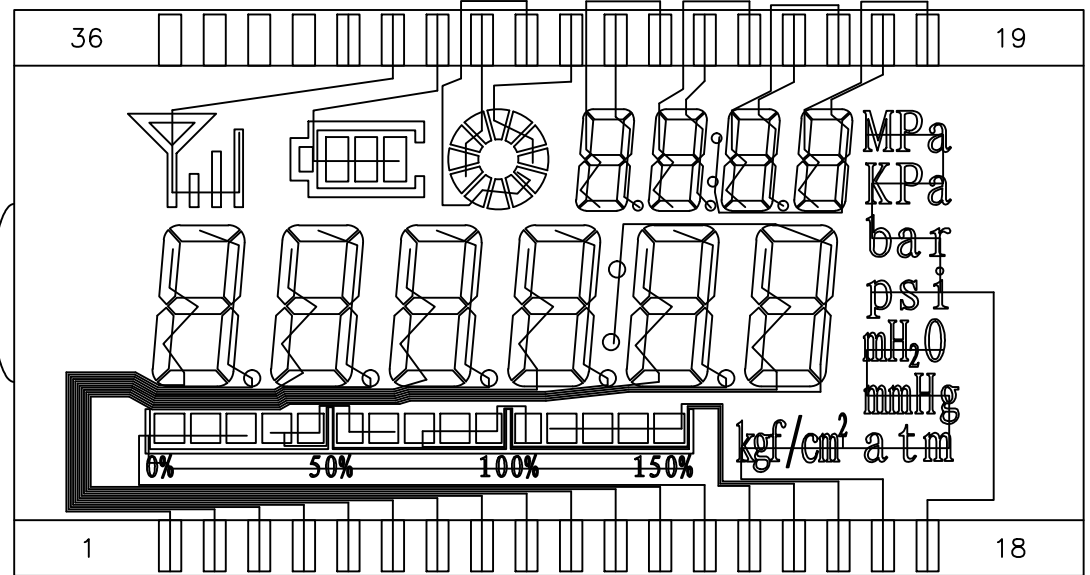

COM

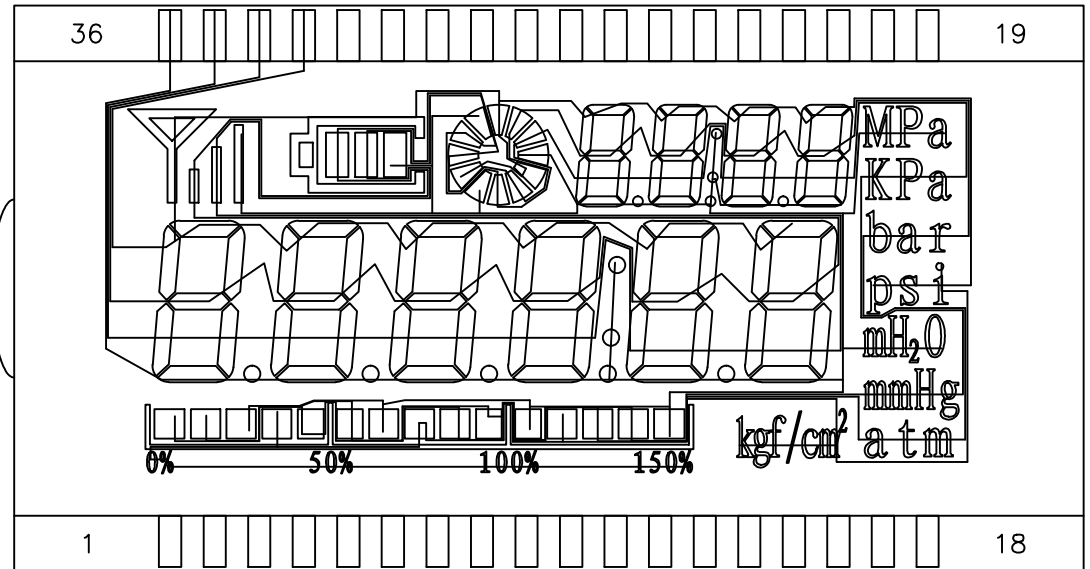

大连奇耘电子有限公司
DALIAN QIYUN DISPLAY CO., LTD.

DESIGNED BY:

LYS


GDC04362S(T)P10V3T

VERSION: 2.0

NO. 4 OF 4

CHECKED BY:

LC



UNIT: mm

DATE: 2019-05-28

TOLERANCES UNLESS OTHERWISE SPECIFIED: ±0.2

此页图案仅供走线参考!